

# ACCESS SAFETY PLATFORMS TYPE MB-D / MB-F / MB-K



Type MB-D



Type MB-D/L

**Access safety platforms ensures safety for repairs and maintenance work**

- number of persons permitted: 2
- fork sleeves with safety mechanism to prevent slipping
- with galvanized tool deposit
- approved by the german technical inspection agency "TÜV", in compliance with the "BGV" (German accident prevention regulations)

## Types available

### Type MB-D

- picked up lengthwise by a forklift truck

### Type MB-D/L

- picked up crosswise by a forklift truck

### Type MB-F

- folding construction
- just a couple of hand movements and the platform is ready for use
- picked up lengthwise by a forklift truck

### Type MB-K-IV

- according to DIN EN 14502-1
- load capacity 300 kg
- stirrups, 135 mm ground leeway
- with galvanized roof
- standard includes a 4-leg chain
- pick up by crane
- with anchorage point for protective equipment

## Accessories

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake - construction height 220 mm (not type MB-K-IV)
- anchorage points for protective equipment (except type MB-K-IV)



Type MB-K-IV




Type MB-F



anchorage points for protective equipment

## Fork sleeve inside dimensions in mm

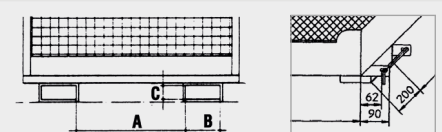

Type	Dimensions in mm (l x w x h)	Floor area in mm	Total permitted weight in kg	Weight painted in kg	A	B	C
MB-D	1115 x 1200 x 1890	800 x 1200	300	120	600	200	80
MB-D/L	1290 x 800 x 1890	1200 x 800	300	120	160	200	80
MB-F	1090 x 1200 x 1890	1000 x 1200	300	120	600	200	80
MB-K-IV	800 x 1200 x 2300	800 x 1200	470	170	-	-	-

Finish:

RAL 2000

RAL 5012

hot-dip galvanized