



Blade Access Equipment




Access to the complete Blade




Specifications



Side view of platform in use

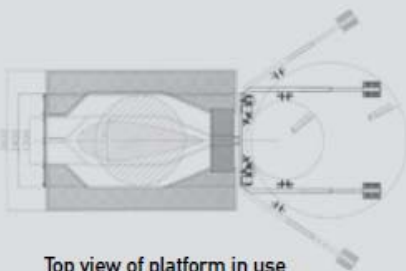

Top view of platform in use



Top view of platform in transport

Self weight platform	1360 kg
Working load	240 kg. (2 persons+80 kg.)
Total weight	1600 kg
Rated speed	8 m/min
Overall Dim for transport (w x d x h)	5400 mm x 2400 mm x 2100 mm
Min Access opening (w x d)	3700 mm x 1200 mm
Max Access opening (w x d)	4900 mm x 2400 mm
Distance of suspension points	1000 mm up to 1600 mm
Overload detection	Red pilot light
Hoists on platform	2 x OCTO 800E (cap. 800kg)
Secondary safety device	2 x Safety Brake mod.II
Control devices	Central control box on platform
Guidance of platform vs. blade	By 2 pull-back units mounted On trailer/
Guidance against tower	By fully adjustable beams (incl. rollers)
Platform frame	Shot blasted, metalised and powder coated steel frame
Platform (telescopic)	Aluminium
Pull-back unit	Shot blasted, metalised and powder coated steel frame
Hoists on pull-back unit	2 x OCTO 800E incl. winders for steel wire ropes
Electrical equipment	IP 55
Temperature range	-20° C to +40° C (standard)
Power	5 kW
Voltage	400 V/50 Hz
Power socket	32A