

# 18. KING




**Yard ramp,  
 PERFECT TO  
 load from groundfloor  
 to trucks/containers  
 with forklifts**




**CAPACITY 8000 KG**

**DETAILS:**


- Profile with "IPE200/240" galvanized steel axles for 8000kg capacity
- Connection bars with "IPE160/180 galvanized steel carrying axles.
- Metal junctions and mechanical accessories firmly linked through bolts and screws.
- Aluminum 6060 alloy extruded antislip plate with side 100mm safety border.
- Manually adjustable feet for different heights. [-/+ 300mm]
- Aluminum 6060 alloy extruded CR40B connection lip for perfect fitting on truck-back.
- Rubber wheels for ramp moving through forklift at the groundfloor side.
- Galvanizing treatment to every steel part of the structure.

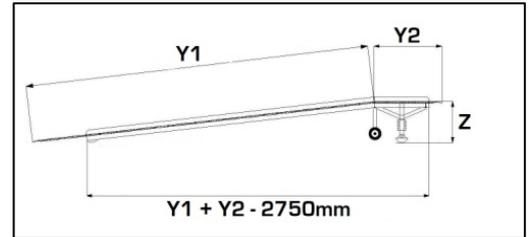

CODE	X1	X2	Y1	Y2	Z
	(mm)	(mm)	(mm)	(mm)	(mm)
<b>KING 100</b>	2200	2380	10000	2400	1100
<b>KING 120</b>	2200	2380	12000	2400	1100
<b>KING 140</b>	2200	2380	14000	2400	1100

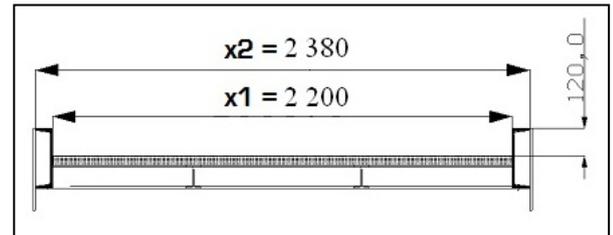

## ACCESSORIES

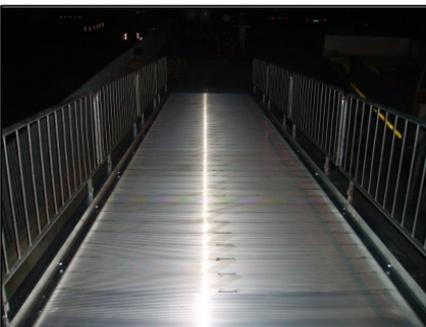

**Lateral antifalling  
 handrails**



**Grid steel sheets  
 (for loading/unloading outside or  
 in relevant slip risk situations)**



**PVC covering tunnel**