


SH-3-KJ



SUCCI-LIFT

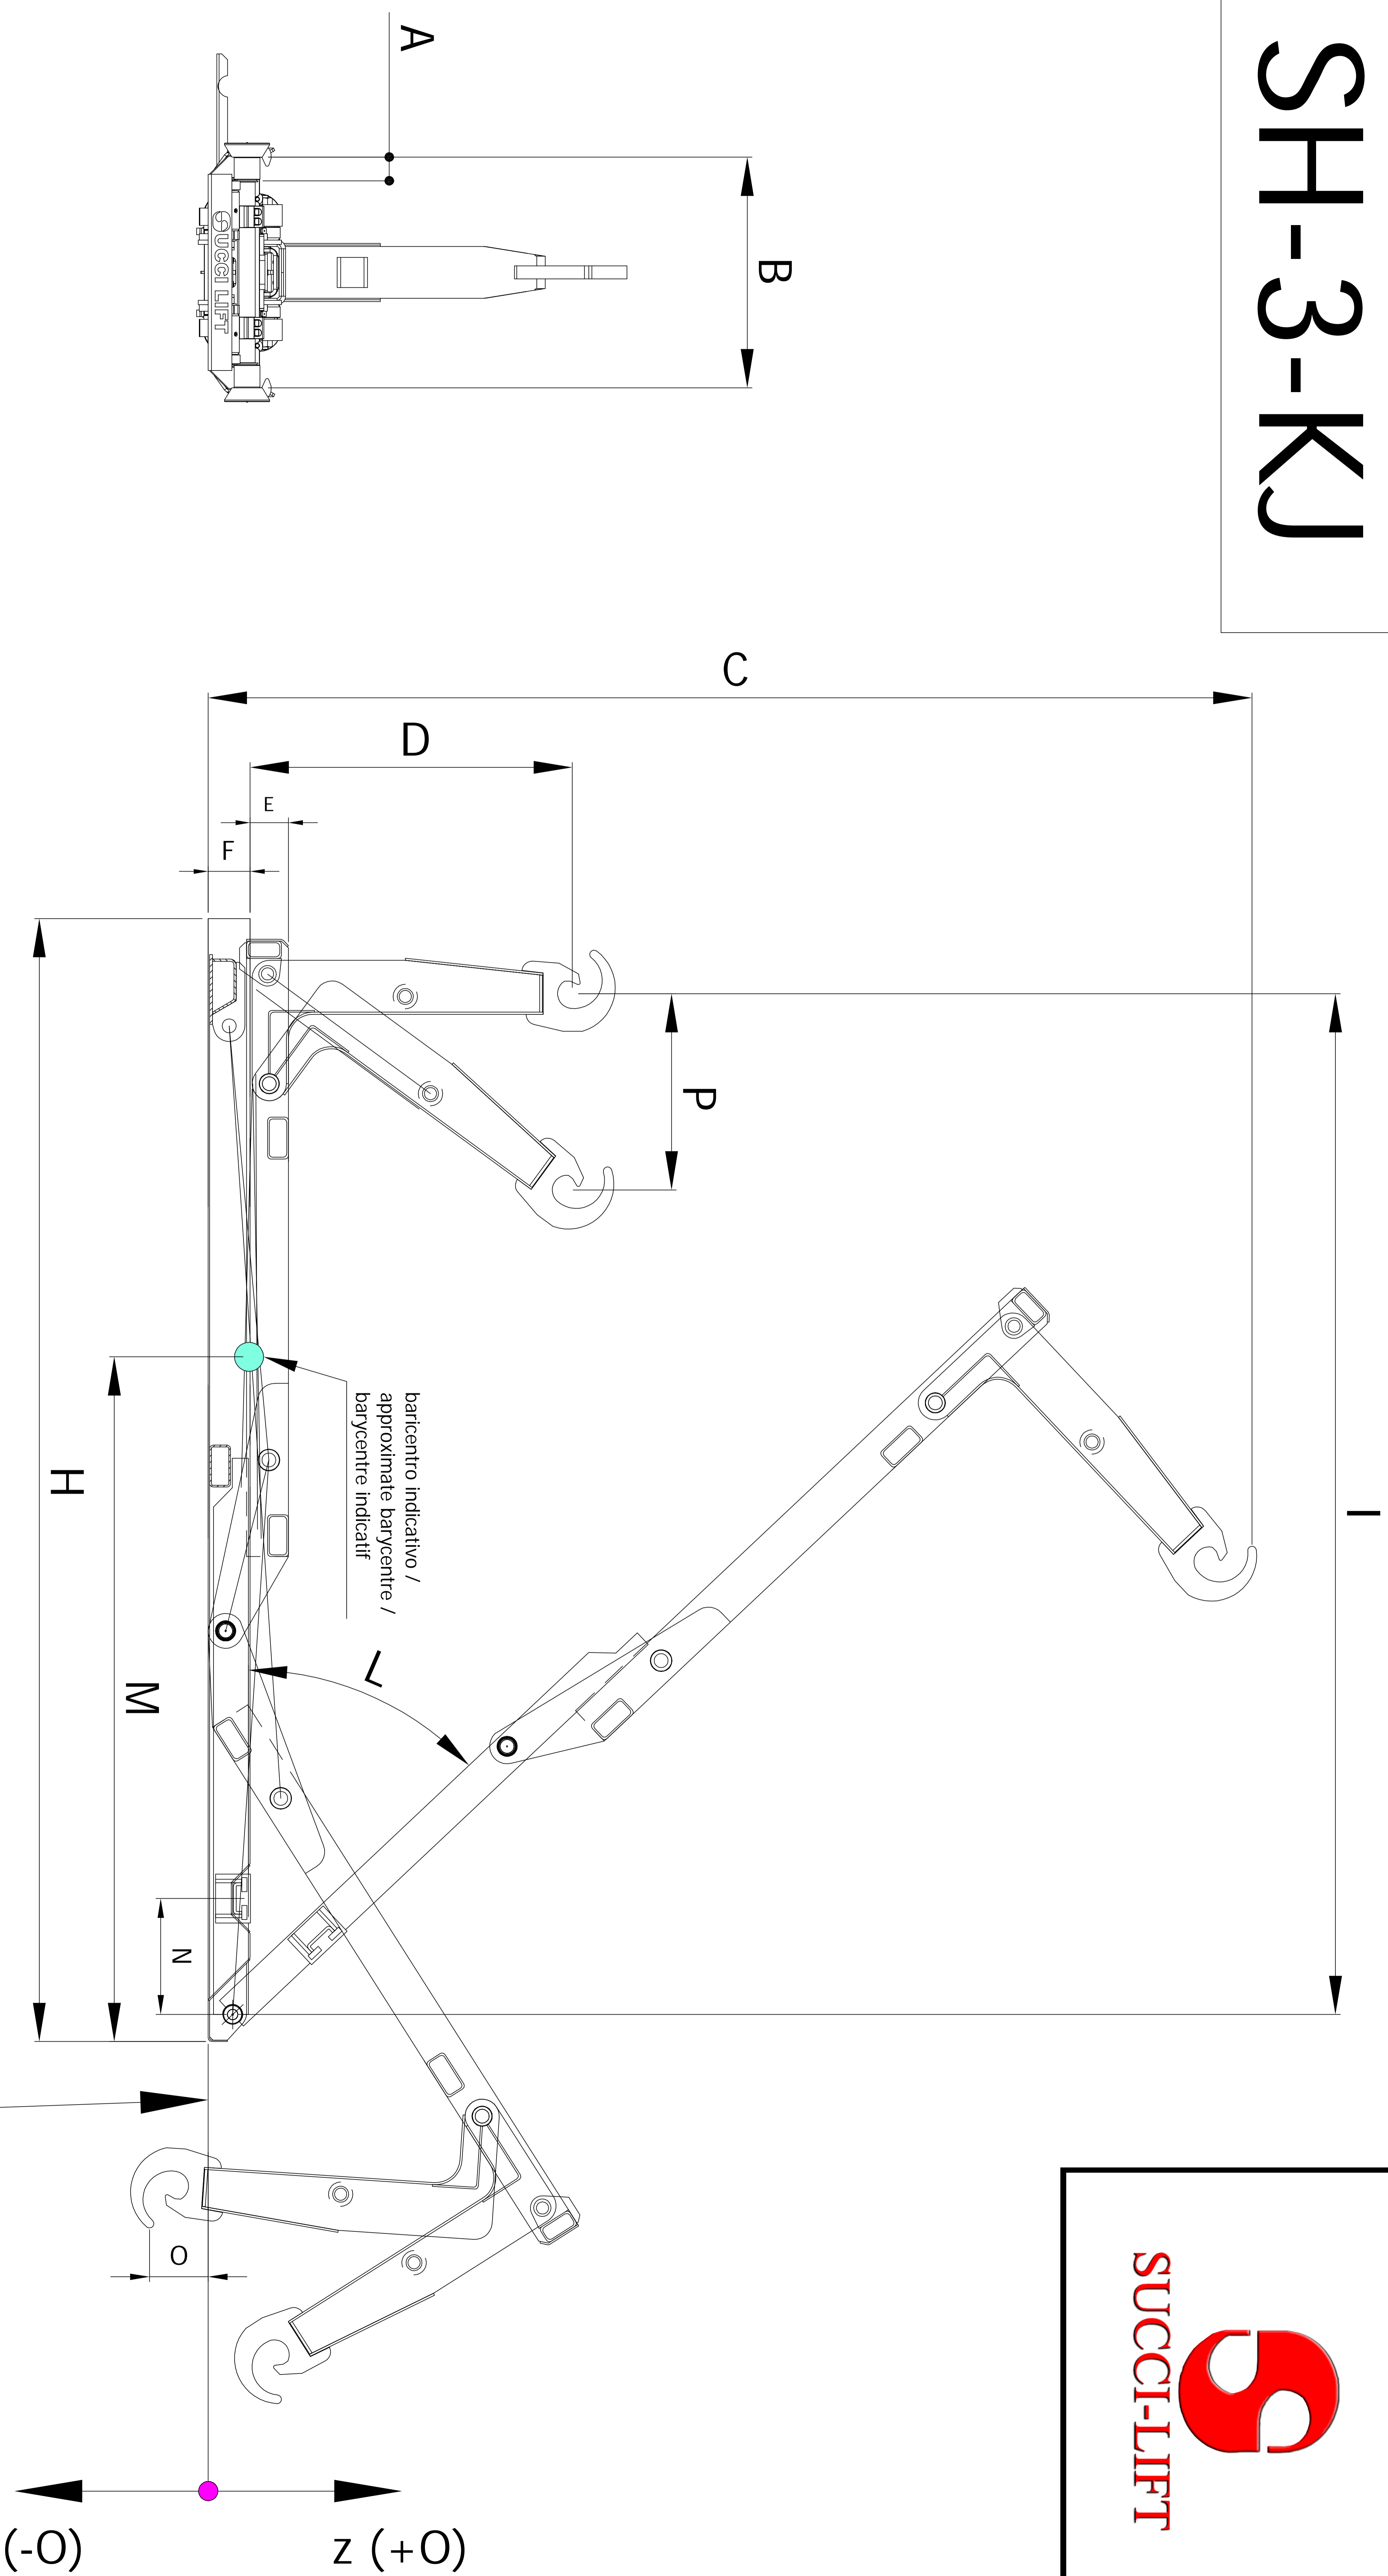

MODELLI / MODELS / MODELES	Capacità di sollevamento (kg) / Loading Capacity (kg) / Capacité de levage (kg)	Pressione max di esercizio (bar) / Max working pressure (bar) / Pression maximum d'exercice (bar)	Pompa consigliata (l/min a 1000 rpm) / Recommended pump (l/min at 1000 rpm) / Pompe recommandée (l/min à 1000 rpm)	Peso dell'attrezzatura scarrabile (kg) / Hooklift system weight (kg) / Poids du bras polybenne (kg)	MISURE CARATTERISTICHE / FEATURES MEASURES / MESURES CARACTERISTIQUES															
					A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (°)	M (mm)	N (mm)	O (mm)	P (mm)		
SH-3-KJ-25	3000	260	35	445	110	1070	3000	900	120	120	120	2600	2500	47	1850	335	156	563		
SH-3-KJ-30	3000	260	35	480	110	1070	3000	900	120	120	120	3100	3000	47	1850	335	156	563		
SH-3-KJ-33	3000	260	35	500	110	1070	3070	900	120	120	120	3400	3300	47	1930	335	156	563		