

SMART LIGHT evo | SMART PLUS AC-evo

Compactness for the smallest spaces

Capacity (kg): 1500 / 2000 Lifting Height (mm): 200

SMART LIGHT evo / SMART PLUS AC-evo

Maximum compactness, versatility and elegance for agile, quick and safe handling operations. The smallest device within its category, compact as a manual pallet truck, it is the best solution to get out of small spaces, where agility and compactness are the fundamental features being required. The aforesaid features make it particularly suitable for handling operations on lorries and articulated lorries, which are characterised by very small manoeuvring spaces. It is available in 1500 Kg (Smart light) and 2000 Kg versions.

AC technology

- + Performance
- + Driving control
- Service Costs



POWERED PALLET TRUCKS

Features in detail:



NEW DR EVO DRIVE STEERING:

Includes LED battery charge indicator, "turtle" switch for variable speed control, precision proportional lifting / lowering control and safety reversing (crushproof) switch.



TRACTION AND STABILITY:

Structure with 5 contact points and shock-absorber system for grip by the driving wheel in case of floor irregularities. Includes motor-wheel with SEM technology and energy recovery braking system.

SMART DL AC-evo

Multi-functionality

Capacity (kg): 1800-1050 / 1800-700 Lifting Height (mm): 200-1400 / 200-700

SMART DL AC-evo 180/14

In addition to lifting to 200 mm from the floor like a common pallet truck, the TPE's forks lift independently to 1400 mm. Combine traditional pallet handling operations with additional functions such as storage and picking from shelves and unloading motor vehicles. The lifting of the support legs allows simultaneous handling of two pallets and passing over ramps and other obstacles on the floor.

AC technology

- + Performance
- + Driving control
- Service Costs



SMART DL AC-evo 180/07

Version equipped with first lifting stage up to 200 mm and secondary fork lifting up to 700 mm.

POWERED PALLET TRUCKS

Features in detail:



Handling of two pallets.



Motor Vehicle Loading and Unloading Operations.





Storage and picking of goods.





SMART LIGHT evo - SMART PLUS AC-evo

| model | 150/200 | 200/200 |
|-------|------------------|---------------|
| Q | Kg 1500 | 2000 |
| C | mm 600 | 600 |
| I | mm 1150-1000-800 | 1150-1000-800 |
| L | mm 1615 | 1615 |
| X | mm 205 | 205 |
| X2 | mm 190 | 190 |
| Y | mm 1220 | 1220 |
| L2 | mm 465 | 465 |
| M | mm 560 | 560 |
| N | mm 180 | 180 |
| h1 | mm 1440 | 1440 |
| h3 | mm 200 | 200 |
| B | mm 750 | 750 |
| WA | mm 1430 | 1430 |

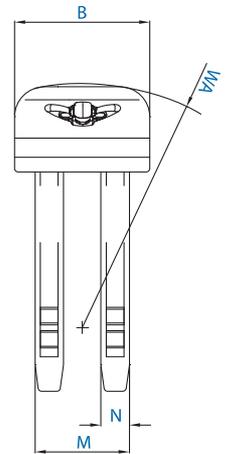
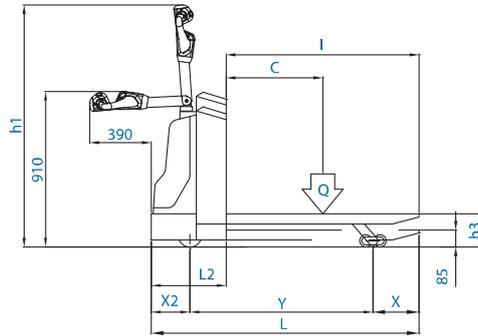


STANDARD EQUIPMENT

- AC three-phase technology traction motors (only for SMART PLUS version) • Electronic battery charger 24V 20A with microprocessor • Forks control by push-buttons • Electric end stroke • Proof-seal bearings with pins with self lubricating sintered bushings • Electromagnetic parking brake • Braking in release contra flow • High-frequency electronic plant 24V with separated excitation with braking in release contra flow • Fixed forks length mm. 800-1000-1150 • Shock absorber on driving-wheel • Exhausted battery warning-indicator • Side wheels with extra-heavy castors • Tandem or single fork rollers • DR-EVO Steering • Safety components • n.2 Battery 12V 155AH (for SMART PLUS) or 12V 110AH (for SMART LIGHT); (traction Battery 24V 130 AH on request)


SMART DL AC-evo 180/07

| model | 180/07 |
|-------|---------|
| Q1 | Kg 750 |
| Q2 | Kg 1800 |
| C | mm 600 |
| I | mm 1150 |
| L | mm 1755 |
| X | mm 170 |
| X2 | mm 185 |
| Y | mm 1400 |
| L2 | mm 605 |
| M | mm 566 |
| N | mm 188 |
| h1 | mm / |
| h3 | mm 700 |
| B | mm 750 |
| WA | mm 1610 |

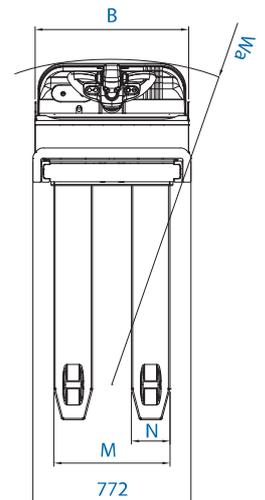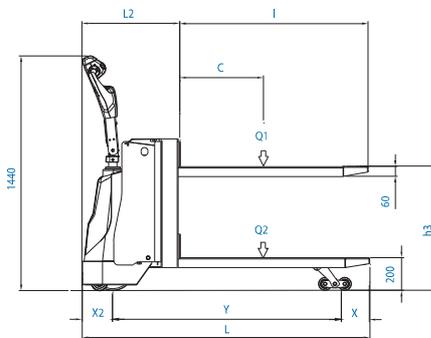

SMART DL AC-evo 180/14

| model | 180/14 |
|-------|---------|
| Q1 | Kg 1050 |
| Q2 | Kg 1800 |
| C | mm 600 |
| I | mm 1150 |
| L | mm 1755 |
| X | mm 170 |
| X2 | mm 185 |
| Y | mm 1400 |
| L2 | mm 605 |
| M | mm 566 |
| N | mm 188 |
| h1 | mm 1170 |
| h3 | mm 1400 |
| h4 | mm 1830 |
| B | mm 750 |
| WA | mm 1610 |

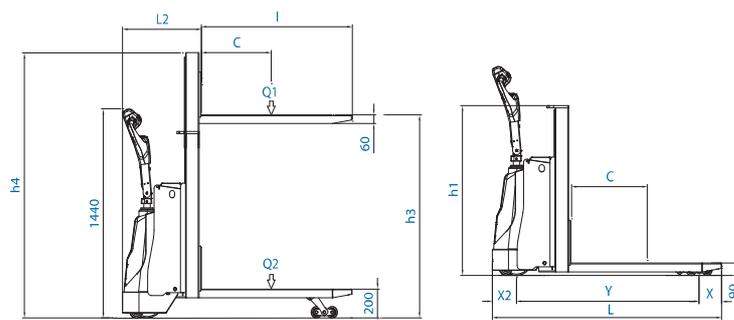

STANDARD EQUIPMENT

- AC three-phase technology traction motors • Electronic battery charger 24V 20A with microprocessor • Forks control by push-buttons • Electric end stroke • Proof-seal bearings with pins with self lubricating sintered bushings • Electromagnetic parking brake • Braking in release contra flow • High-frequency electronic plant 24V with separated excitation with braking in release contra flow • Fixed forks length mm. 1150 • Shock absorber on driving-wheel • Exhausted battery warning-indicator • Side wheels with extra-heavy castors • Tandem fork rollers • DR-EVO Steering • Safety components • Traction Battery 24V 130AH MBS