

VB9_8m

Light tower with hi-res floodlights and low fuel consumption. Eco friendly product.




Application fields



TRANSPORT

9 TOWER PER TRUCK

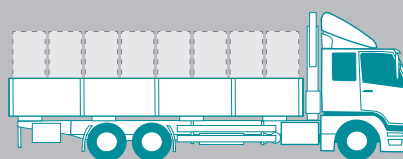

FEATURES

- 8m max height
- 4 stabilizers
- Galvanized sections
- Hydraulic lifting system
- 340 degree mast rotation by hand
- Certified wind stability until 80Km/h
- On/Off switches one for each lamp
- 4 floodlights 400W metal halide
- Manual safety valve which enables you to lower the tower safely, if the hydraulic system is damaged
- Structure assembled on single axle site-tow trailer without brakes
- 170 litres long run fuel tank
- More than 250 hours run time
- Bunded tank to avoid fuel spillage on the ground
- 5KVA super silent generating set 3000rpm- Kohler diesel engine, 1 cylinder, 7,5Hp
- 2,5KVA-230V outlet with ELCB protection
- Fuel consumption 0,5l/h
- Noise level 91LWA

TECHNICAL DATA

Dimensions and weight	
Min Dim. (cm)	240x143x222
Max Dim. (cm)	240x198x800
Weight (kg)	965
Illuminated area	
	2600m ²
Features	
Rotation	340°
Floodlights	Metal halide
Lamps	4x400W
Lifting system	Hydraulic
Optional	Road tow-trailer